




## Level Control and Pressure Sustaining with Bi-Level Electric Float

Hydraulically operated level control and pressure sustaining control valve that controls reservoir filling and reservoir level; during filling the valve sustains minimum upstream pressure, regardless of fluctuating flow or reservoir level.

The reservoir filling is done in response to a Bi-level electric float switch signal opening at a pre-set low level and shutting off at a pre-set high level.


BERMAD 700ES series valves are hydraulically operated globe valves in either standard oblique (Y) or angle pattern. They consist of full bore hydrodynamic body for unobstructed flow path, seat assembly and double-chamber unitized actuator that can be disassembled from the body as an integral unit. The 700ES valves have excellent and highly effective modulation capacity in high pressure-differential applications and are designed to operate with minimal cavitation and noise under difficult operation conditions.

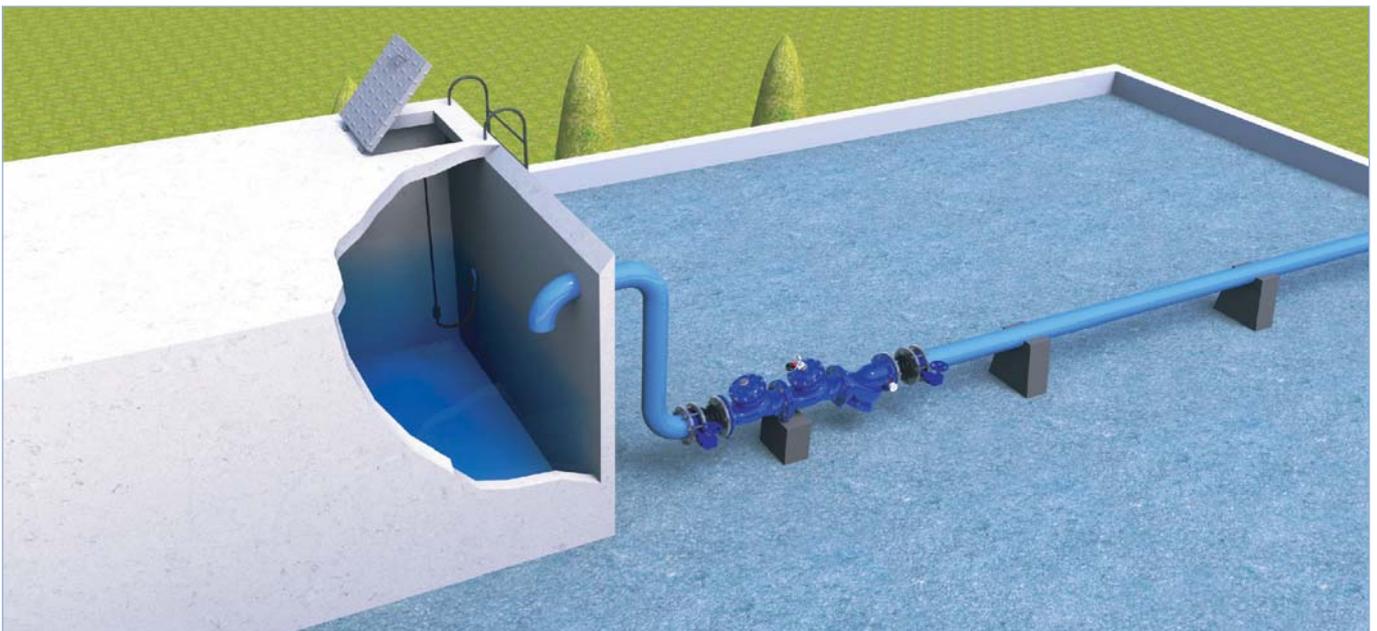

For illustration only

### Typical Application

- Level and pressure sustaining control of buildings' reservoir filling systems such as: basement, roof-top, pressure breaking and emergency tanks, where the supply line also feeds additional high priority users
- Electrical emergency override on hydraulic level control systems
- Duty cycle and valve prioritizing management on multi branch systems
- Level dependant control on water supply lines; maintaining emergency minimal reservoir level
- Optional complete closing of the valve by external hydraulic/electric control source, regardless of the supply line pressure

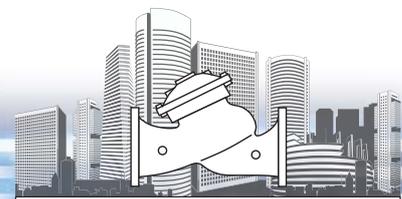

## 700ES Series Level Control


Model WW-753ES-65-BP

### Features and Benefits

- Excellent quality construction materials ensure reliable, resilient and long lasting operation
- Durable, sophisticated and lightweight design ensure minimal cavitation damage and noise even under difficult and highly intensive operation conditions
- Hydrodynamic body and high performance actuator provide an unobstructed flow path with minimal pressure loss and outstanding modulation capability under conditions of high differential-pressure operation
- Double chamber actuator, fully operational under very low pressure conditions including optional full opening & closing action under zero line pressure; provides smooth, immediate valve response with no hammer effect.
- Near maintenance-free straightforward balanced design including an actuator that can be easily disassembled from the valve body as a separate integral unit for minimal downtime.
- Accurate and reliable level control and pressure sustaining capabilities - preventing reservoir overflows and cut-offs while maintaining minimum upstream pressure
- Heavy duty design - suitable for water reservoirs operating under tough conditions and intensive use
- Hydrodynamic valve body – ensures minimal noise operation
- Electrical operation; Low voltage and low current N. O. and N. C. solenoids

### Technical Data

Table		Kv	A, B (mm)	C (mm)	L (mm)	H (mm)	W (mm)	Weight (kg)
DN	inch							
50	2"	50	350	180	230	250	250	10.8
80	3"	65	370	180	310	260	260	15
100	4"	150	395	230	350	320	320	26
150	6"	360	430	275	480	390	390	55
200	8"	620	475	385	600	507	507	95

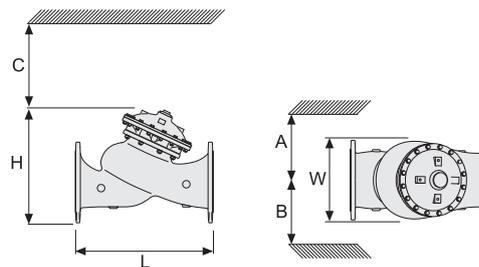

### End Connections:

**Flanged:** ISO 7005-2 (ISO 10, 16 & 25)

**Pressure Rating:** 16, 25 bar (230, 362 psi)

**Valve Pattern:** Y

**Working Temperature:** Water up to 80°C (180°F)

### Main Construction Materials:

**Body, Cover and Actuator:** Ductile iron to EN 1563 or ASTM A-536

**Internals:** Stainless steel, bronze & epoxy coated steel

**Control Trim System:** Brass control components / accessories

Copper & Brass tubing & fittings

Optional: Stainless Steel 316

**Elastomers:** Synthetic Rubber

**Coating / Colour:** Electrostatic Polyester Powder Blue

Optional: Epoxy Fusion-Bonded Blue

For other optional materials consult BERMAD

### How to Order

Please specify the requested valve in the following sequence:

Size	Model	Category	End Connections
	753ES-65	BP	
2" 3" 4" 6" 8"			ISO-16 16 ISO-25 25 ABNT16 B6 ABNT25 B2 ANSI150 A5



For full technical specifications, see Engineering section or consult BERMAD

[info@bermad.com](mailto:info@bermad.com) • [www.bermad.com](http://www.bermad.com)

The information herein is subject to change without notice. BERMAD shall not be held liable for any errors. All rights reserved. © Copyright by BERMAD. PC7BE12-753ES-65-BP