


Proportional Pressure Reducing Valve

Model BC-720-PD-P

Hydraulically operated, diaphragm actuated pressure reducing control valve that reduces a high upstream pressure to a lower downstream pressure at a fixed ratio.

BERMAD 700 series valves are globe style control valves available in either standard Y (oblique) or angle pattern configurations. They have a full bore hydrodynamic body providing an unobstructed flow path, with a seat assembly and double chamber unitized actuator that can be removed from the body as a separate integral unit.

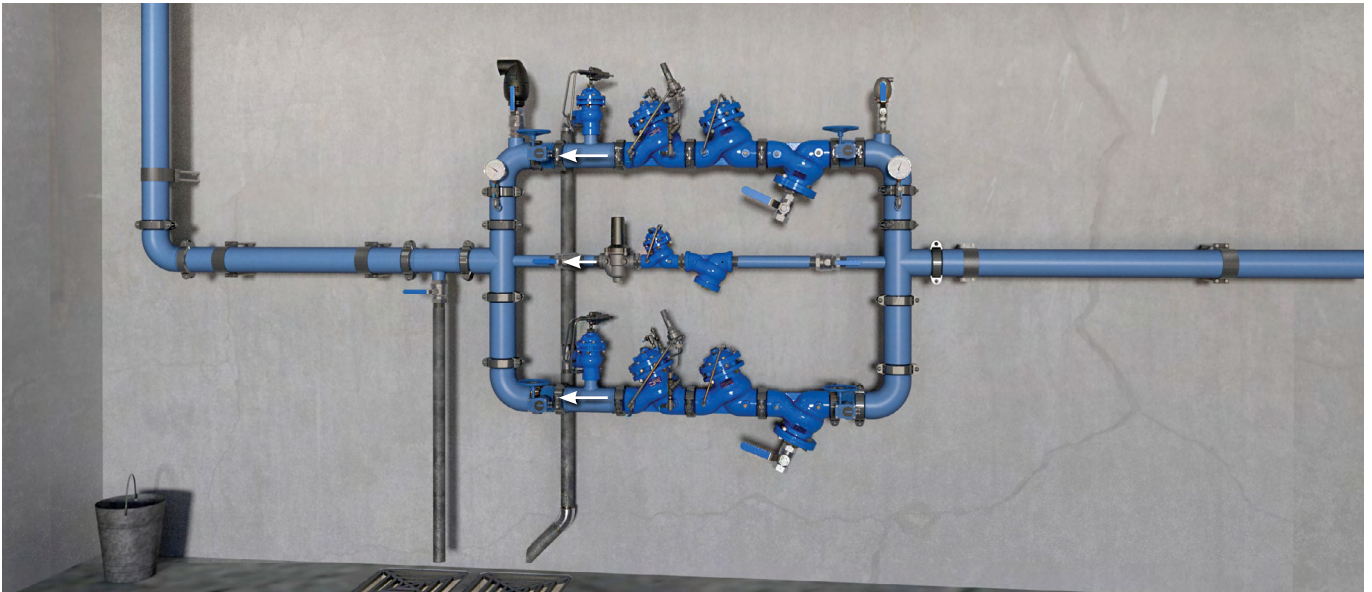


Two-Stage Pressure Reducing Station, featuring BERMAD BC-720-PD-P valves to reduce the incoming pressure by a fixed ratio and share the load with the BERMAD BC-720-P PRV, a redundant, parallel branch to minimize the possibility of total water shut-off and a low flow bypass branch for low demand operation. For information on the other BERMAD products in this system please see the product data sheet for the following components: BERMAD BC-720-P, BERMAD BC-73Q-P and BERMAD BC-70F-P.

Typical Application

- "Steps down" pressure when pressure reduction must be done in two or more stages
- Decreases the potential for high noise levels and cavitation damage caused by high reduction ratios
- Reduces the differential pressure load across level control or pressure relief valves by splitting that load between two valves instead of one

All images in this catalog are for illustration only



Features and Benefits

- High Quality Construction Materials – Reliable, resilient and long lasting operation
- Robust Design – Suitable for constant, intense operation
- In-Line Serviceable – Quick and easy maintenance and service
- Line Pressure Driven – Independent operation, no external power needed
- Unitized Actuator Assembly – Minimal downtime
- Hydrodynamic Body with Unobstructed Flow Path – Minimal noise and cavitation damage
- Protected Diaphragm – Minimizes chance of damage caused by debris in the pipeline
- Double Chamber Actuator – Rapid response to system changes with no hammer effect
- V-Port Throttling Plug – Low flow stability

Technical Data

Reduction ratios range (P1/P2) from 2.2 to 2.6. The reduction ratios are influenced by multiple factors including flow and inlet pressure.

End Connections: Grooved, Flanged, Threaded

Pressure Rating: 250, 400 psi; PN16, 25

Valve Pattern: Y (Oblique) and Angle

Working Temperature: Water up to 180°F; 80°C

Main Valve Materials:

Body, Cover and Partition:

Standard: Ductile Iron

Optional: Stainless Steel 316

Internals: Stainless Steel, Bronze and Coated Steel

Tubing & Fittings: Stainless Steel 316

OR Copper and Brass

OR Reinforced Nylon and Brass

Diaphragm: EPDM, Nylon Fabric-Reinforced

O-Rings: EPDM

Seal: NBR

Coating: Fusion Bonded Epoxy, RAL 5017 (Blue)

How to Order

Please specify the requested valve in the following sequence:

	Size	Model	Scope & compatibility	End Connections & Pressure Rating
BC		720-PD		
Building and Construction	1½"		Potable Water	Up to 250 psi / PN16
	2"		WRAS	Grooved ANSI C606 VI
	2½"		DVGW	Flanged ISO-16 16
	3"		ACS	ABNT16 B6
	4"		GOST	ANSI150 A5
	6"		BELGAQUA	JIS-16 J6
	8"		PZH	Threaded BSP BP
	10"		BULGARCONTROLA	NPT NP
	12"		SVGW	
	Larger sizes available on request		NSF 61/372 P2	250-400 psi / PN25
			AS 5081 P3	Grooved ANSI C606 V2
			WATER MARK P0	Flanged ISO-25 25
			Unregistered	ABNT25 B2
				ANSI300 A3
			Fire Protection	Threaded BSP PH
			UL & FM UF	NPT NH
			UL UL	
			FM FM	
			Unregistered F0	
			HVAC	
			Unregistered E0	
			Treated Water	
			Unregistered T0	

For other optional materials consult BERMAD

For Dimensions & Weights, IOM and more other detailed engineering data, visit the Series Engineering Documentation or the Downloads Center on the [BERMAD website](http://www.bermad.com)

Drinking Water Standards, Approvals & Certification:



NSF 61/372 USA



WRAS UK



DVGW Germany



ACS France



GOST Russia



BELGAQUA Belgium



AS 5081 Australia



Watermark Australia



PZH Poland



Bulgarcontrola Bulgaria



SVGW Switzerland



ISO 9001 - 2008



info@bermad.com • www.bermad.com

© Copyright 2007-2012 Bermad CS Ltd. All Rights Reserved. The information contained in this document is subject to change without notice. BERMAD shall not be liable for any errors contained herein. September 2016